



SERVICE BULLETIN PP2023-11-2

PART # 0585023 - Obsolete

TEMP SWITCH

Models Covered

- Various 90HP – 115HP, Mid 90's Johnson and Evinrude
- Various 150HP – 175HP, Mid 90's, Johnson and Evinrude
- Various 120HP – 225HP loopers, Johnson and Evinrude
- Various Inline 60-70HP – Mid 90's, Johnson and Evinrude
- Various 25 – 35, 3cyl – Mid 90's, Johnson and Evinrude

Situation

The Port Temp Switch (P/N- 0585023) has become obsolete
You can use the Starboard Temp Switch (P/N- 0585184) By grounding the white wire
See example photos



Available on




SERVICE BULLETIN PP2023-11-2

PART # 0585023 - Obsolete

TEMP SWITCH

Procedure

Cut the white wire off the 0585184 Temp Switch and put a ring terminal on it

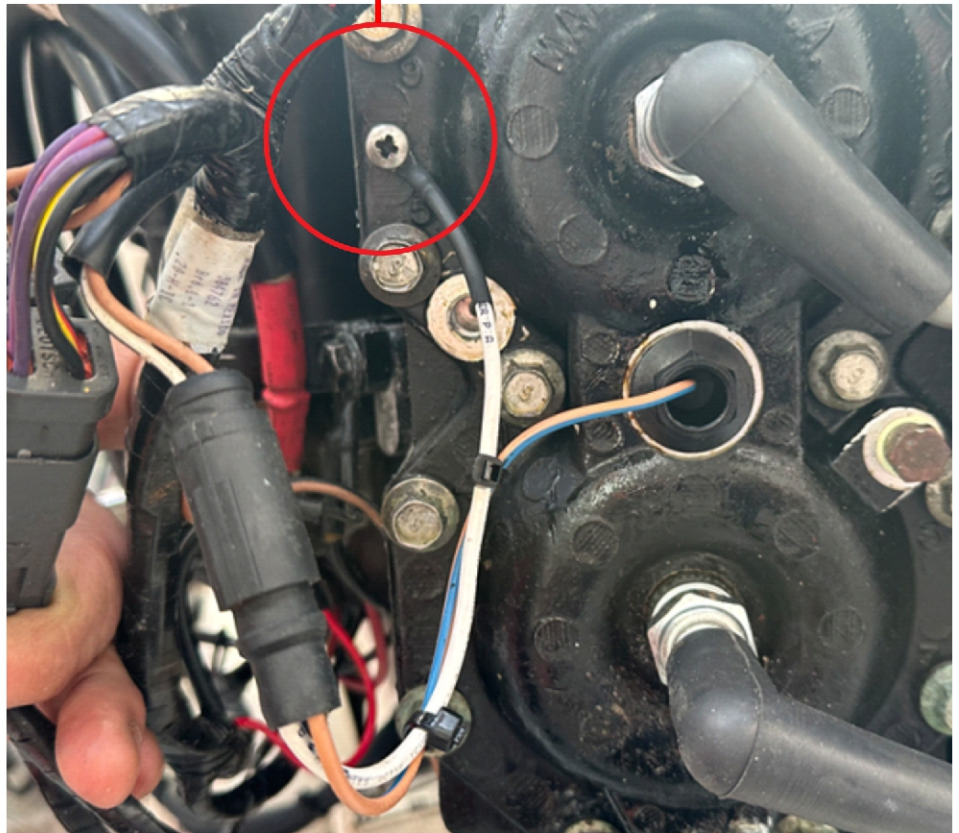

0585185 – Substitute Temp Switch (After Modification – Installed)

Note:

QuickStart will deactivate after 10 seconds, this needs to be explained to the customer as the engine may require a longer time to warm up.

Available on

MARINECONNECT